

Accessories

SEMICONDUCTOR | ANALYTICAL EQUIPMENT | AEROSPACE | TELECOMMUNICATIONS



OIL EXPLORATION | R&D | HIGH ENERGY PHYSICS | MILITARY/DEFENSE | BIOTECHNOLOGY



*Advanced Ceramic-to-Metal &
Glass-Ceramic Sealing Technology*

Description

Accessories is the product classification given by CeramTec for miscellaneous hardware that is used to connect, terminate, install, or isolate Ceramaseal® products.

Contacts

- Used to connect conductors for instrumentation, thermocouples and power in high-temperature vacuum systems, inert atmospheres or in air
- Operational to as high as 400° C
- Thermocouple contacts use thermocouple materials to minimize the induced error from dissimilar materials
- Can be used as direct replacement for the contacts in most of our standard plugs

Plugs

- All coaxial instrumentation and thermocouple plugs can be purchased separately
- All of the standard plugs can be found in the catalog section where they are used
- High voltage (up to 25 kV) and extended temperature range (up to 260° C) plugs are shown here in the Accessories section

In-Vacuum Cables

- Voltages up to 2 kV DC
- Current up to 25 Amps
- Suitable for UHV use
- Temperature ratings as high as 650° C
- Variety of terminations
- Can be used with many CeramTec feedthroughs
- Dual cables for instrumentation and thermocouple pairs

Ceramic Spacers

- Manufactured from high-alumina ceramics
- For use in UHV, inert atmospheres or air
- Can be subjected to the high temperatures associated with bake-out cycles
- Can be used in excess of 800° C, but are limited by thermal expansion differences of conductors



- Will accommodate up to 35 conductors while maintaining separation required to withstand instrumentation voltages

Ceramic Standoffs

- Manufactured from high-vacuum grade non-porous ceramic
- 300 series stainless steel washers and 400 series stainless steel bolts provided
- Can be used at temperatures up to 400° C
- Can be used to support cables, plates or samples at elevated voltages within a vacuum or pressure system

- Voltages to 40 kV in vacuum, 16 kV in air
- Refer to the dielectric strength vs. pressure charts in the Technical Reference section for the value associated with changes in pressure

Vacuum Flanges

- Manufactured to meet industry standards
- Made from 304 stainless steel specially processed to eliminate microscopic leak paths

ConFlat Flange

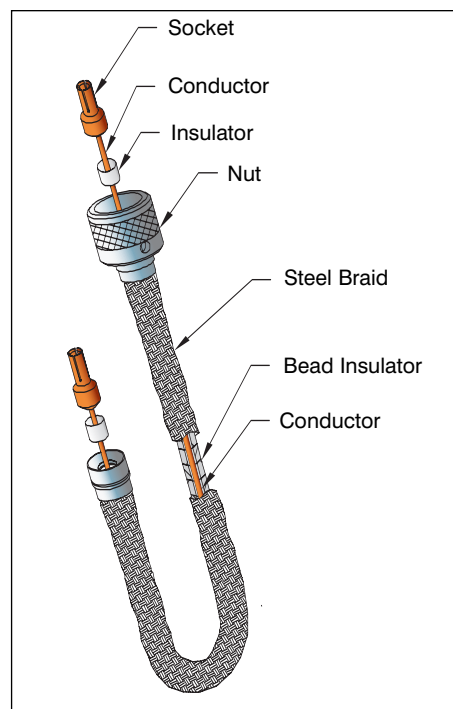
- Vacuum rating to 10⁻¹⁰ torr or better after repeated cycling from -196° C to 450° C
- Create a reliable seal by compressing a flat copper gasket between the seal surfaces of two compatible flanges.

- Can also be used with an o-ring to make the seal

ISO-NW Flange

- Vacuum rating to 10⁻⁹ torr after sustained use to 150° C. Repeated bakeout to 200° C can cause deterioration of o-rings and require periodic replacement.
- Create a vacuum seal by closing an aluminum clamp to compress a Viton o-ring on a centering ring between mating flanges

Typical Cable Construction



Type	Voltage DC	Current	Temperature Rating °C		Material	Sub-section	Section Pages
			Min	Max			
	NA	to 1000 Amps	-269	400	Copper, Copper Alloy, Beryllium Copper, Nickel Alloy, Chromel, Alumel	Contacts	H.1 196-197
	to 12 kV	to 46 Amps	-269	260	See Drawings/Table	Plugs	H.2 198-203
	to 25 kV	to 100 Amps	-70	200	See Drawings/Table	Air Side Cables	H.3 204-207
	to 2 kV	to 25 Amps	-269	650	Kapton® Insulated, Stn. Stl. Braid & Alumina Bead Insulator	In-Vacuum Cables	H.4 208-215
	to 40 kV	NA	-269	800	Steatite, Ceramic – 85% Alumina	Standoffs & Spacers	H.5 216-217
	NA	NA	-269	450	304 Stn. Stl.	Flanges	H.6 218-219

Crimp Contacts

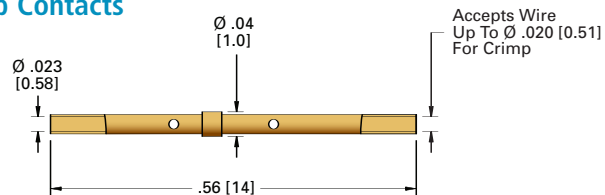


Figure 1

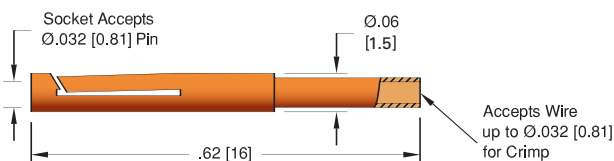


Figure 2

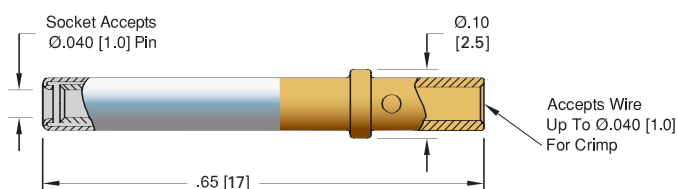


Figure 3

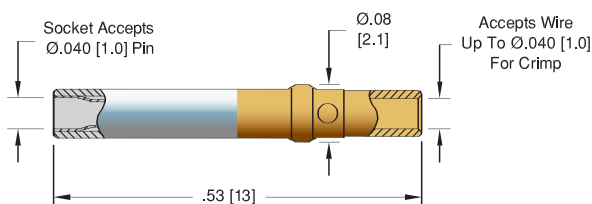


Figure 4

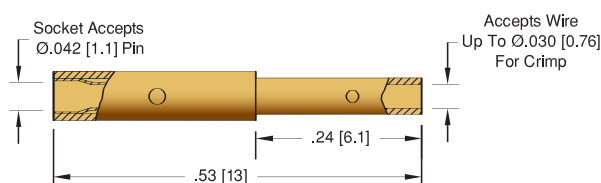


Figure 5

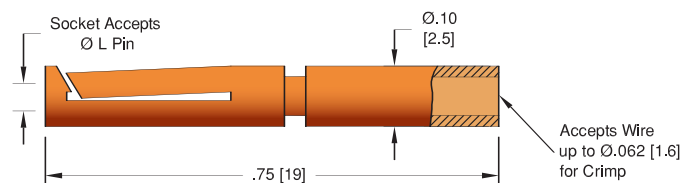


Figure 6

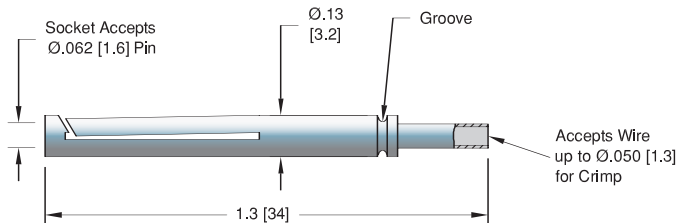


Figure 7

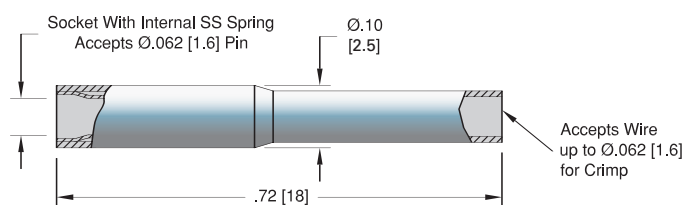


Figure 8

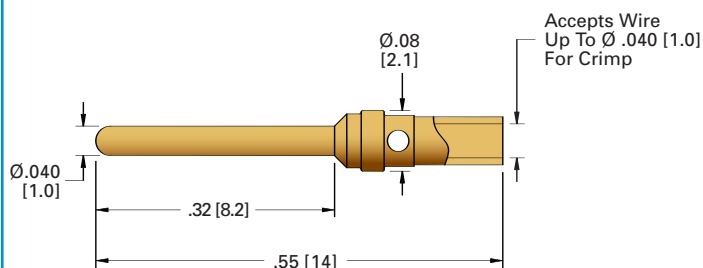


Figure 9

Set Screw Type Contacts

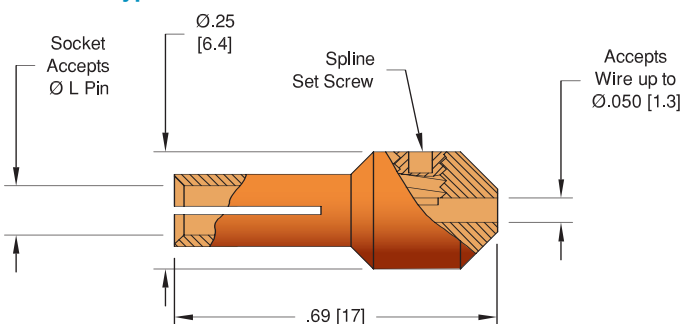


Figure 10

Barrel Type Contacts

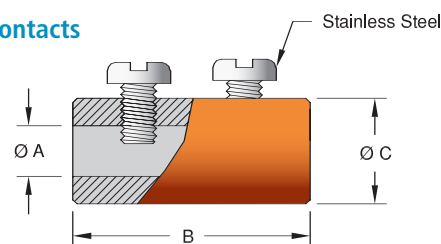


Figure 11

Clamp Type Contacts

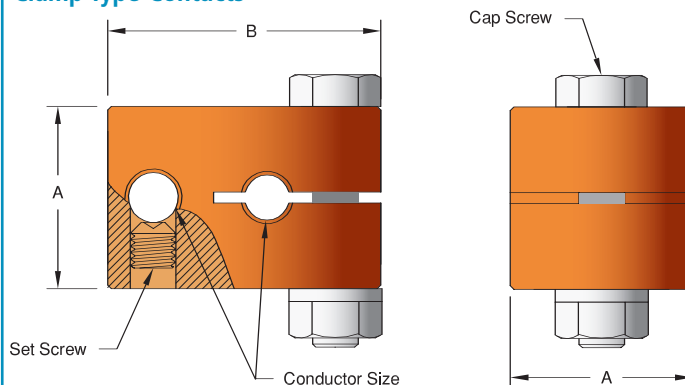


Figure 12

Crimp Type
Female

ACCEPTS PIN DIA.	FIGURE	MATERIAL	CURRENT AMPS	TEMPERATURE MIN	TEMPERATURE MAX	GROOVE	GOLD PLATED	QTY/PK	PART NUMBER
.020 [0.51]	1	Beryllium Copper	2	-269	200	-	Yes	5/Pk	21466-02-A
.032 [0.81]	2	Beryllium Copper	16	-269	200	-	No	10/Pk	11288-02-X†
.040 [1.0]	3	Copper Alloy - Gold Flash	15	-200	200	-	No	5/Pk	16167-03-A
.040 [1.0]	4	Copper Alloy - Gold Flash	15	-200	200	-	No	5/Pk	16757-02-A
.042 [1.1]	5	Stainless Steel	2	-269	450	-	Yes	5/Pk	14461-04-A
.050 [1.3]	6	Beryllium Copper	20	-269	200	-	No	10/Pk	11911-02-X
.062 [1.6]	6	Beryllium Copper	20	-269	200	-	No	10/Pk	2044-02-A
.062 [1.6]	7	Chromel	-	-269	350	Yes	No	5/Pk	11259-05-X
.062 [1.6]	7	Alumel	-	-269	350	No	No	5/Pk	11259-06-X
.062 [1.6]	8	Nickel Alloy	10	-269	400	-	No	10/Pk	0821-01-A

Crimp Type
Male


MALE PIN DIA.	FIGURE	MATERIAL	CURRENT AMPS	TEMPERATURE MIN	TEMPERATURE MAX	GOLD PLATED	QTY/PK	PART NUMBER
.040 [1.0]	9	Copper Alloy	15	-200	200	Yes	5/Pk	17412-02-A

Set Screw Type



DIAMETER L	FIGURE	MATERIAL	CURRENT AMPS	TEMPERATURE MIN	TEMPERATURE MAX	QTY/PK	PART NUMBER
0.040 [1.0]	10	Beryllium Copper	20	-269	200	10	7429-03-A
0.050 [1.3]	10	Beryllium Copper	25	-269	200	10	7429-02-A
0.094 [2.4]	10	Beryllium Copper	25	-269	200	10	7429-01-A

Barrel Type



DIAMETER A	FIGURE	MATERIAL	CURRENT AMPS	DIMENSIONS B	DIMENSIONS C	TEMPERATURE MIN	TEMPERATURE MAX	QTY/PK	PART NUMBER
0.040 [1.0]	11	Beryllium Copper	13	0.50 [12.7]	0.13 [3.2]	-269	400	10	7332-01-A
0.050 [1.3]	11	Beryllium Copper	20	0.50 [12.7]	0.19 [4.8]	-269	400	10	7332-02-A
0.062 [1.6]	11	Beryllium Copper	20	0.50 [12.7]	0.19 [4.8]	-269	400	10	7332-03-A
0.094 [2.4]	11	Beryllium Copper	25	0.56 [14.2]	0.25 [6.4]	-269	400	10	7332-04-A
0.125 [3.2]	11	Beryllium Copper	25	0.63 [16.0]	0.25 [6.4]	-269	400	10	7332-05-A
0.154 [3.9]	11	Beryllium Copper	30	0.75 [19.1]	0.33 [8.3]	-269	400	10	7332-07-A
0.250 [6.4]	11	Beryllium Copper	35	1.00 [25.4]	0.50 [12.7]	-269	400	10	7332-06-A

Clamp Type



CONDUCTOR SIZE	FIGURE	MATERIAL	CURRENT AMPS	DIMENSIONS A	DIMENSIONS B	TEMPERATURE MIN	TEMPERATURE MAX	PART NUMBER
0.250 [6.4]	12	Copper	350	1.0 [25]	1.5 [38]	-269	400	18740-01-A
0.375 [9.5]	12	Copper	400	1.0 [25]	2.4 [60]	-269	400	18737-01-A
0.500 [12.7]	12	Copper	500	1.0 [25]	2.4 [60]	-269	400	18738-01-A
0.750 [19.1]	12	Copper	1000	1.5 [38]	3.1 [79]	-269	400	18739-01-A


Crimp Tool




DESCRIPTION	PART NUMBER
Crimp tool for .025" - .075" crimp diameters	2840-05

†Shown in photo.


SMB




SMA

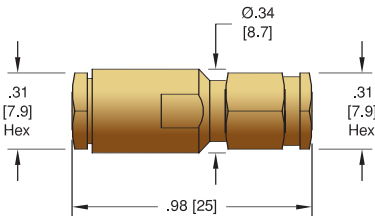


BNC




MHV

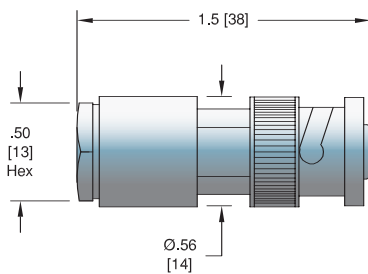


Type N

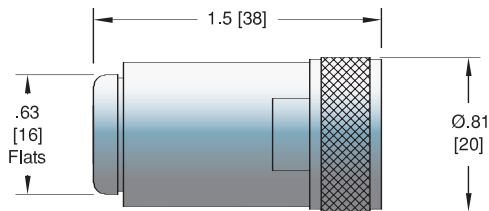


HN

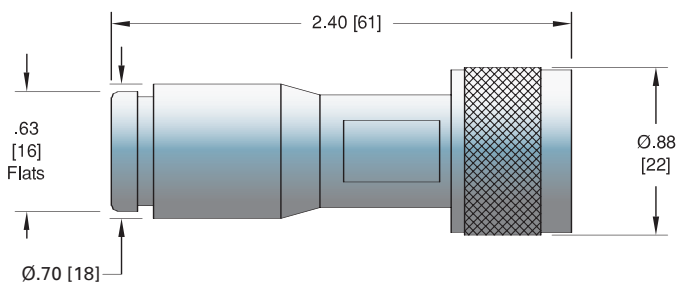


SHV – 5 KV

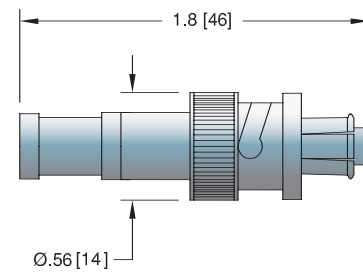


BSHV – 7.5 KV

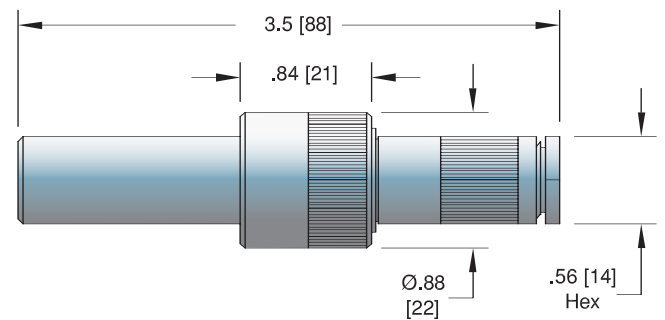

SHV – 10 KV

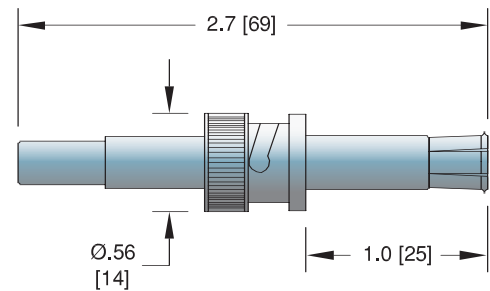









SHV – 20 KV

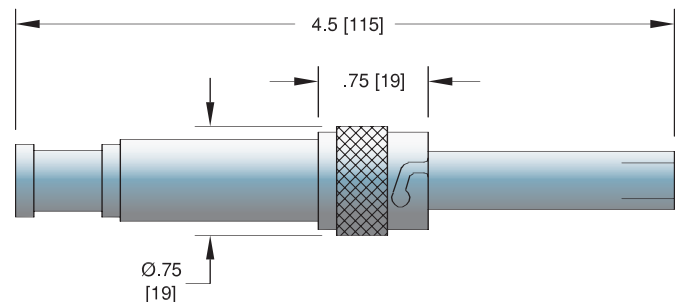



SMB	TYPE	VOLTAGE DC	CONDUCTOR AMPS	TEMPERATURE °C MIN MAX	MAGNETIC MATERIALS	PART NUMBER
	SMB Plug: Air Side	375 V	5	-65 165	No	3095-12
SMA	SMA Plug: Air Side	500 V	5	-65 165	No	6524-02
						
BNC & MHV	BNC Plug: Air Side	500 V	5	-65 165	No	7116-02 [†]
	MHV Plug: Air Side	5 kV	10	-65 165	No	7116-01
Type N	Type N Plug: Air Side	1.5 kV	5	-65 165	No	7707-01
						
HN	HN Plug: Air Side	7 kV	10	-55 165	No	6524-05
						
BSHV – 7.5 kV	BSHV Plug: Air Side	7.5 kV	8	-65 400	Yes	7604-01-A
						
SHV	SHV - 5 kV Plug: Air Side	5 kV	10	-65 165	No	8058-01 [†]
	SHV - 10 kV Plug: Air Side	10 kV	10	-65 165	No	8058-02
	SHV - 20 kV Plug: Air Side	20 kV	20	-20 125	No	8208-02

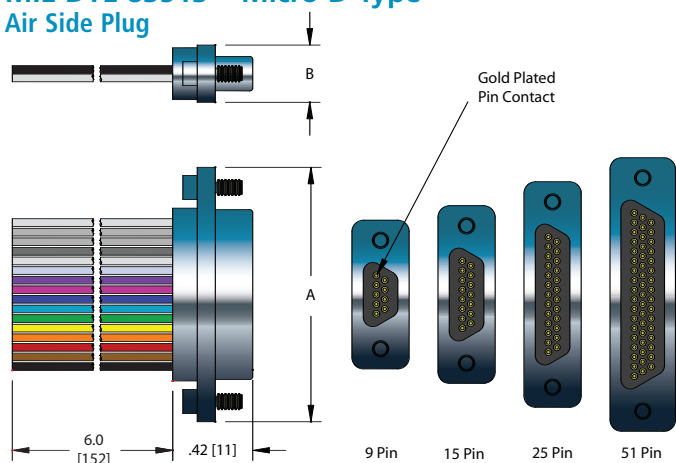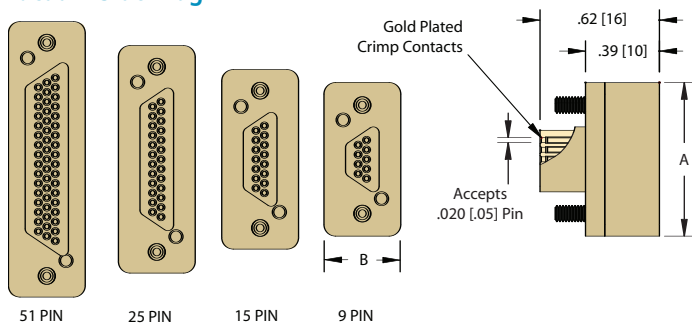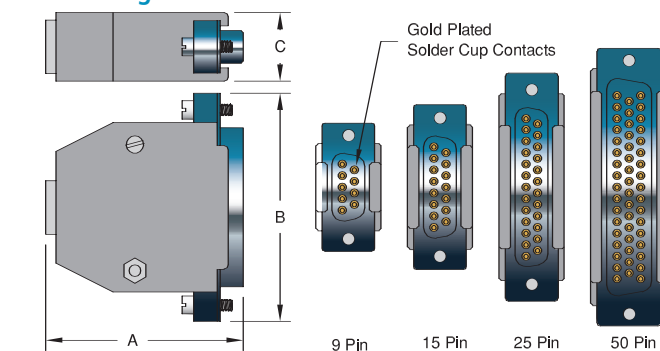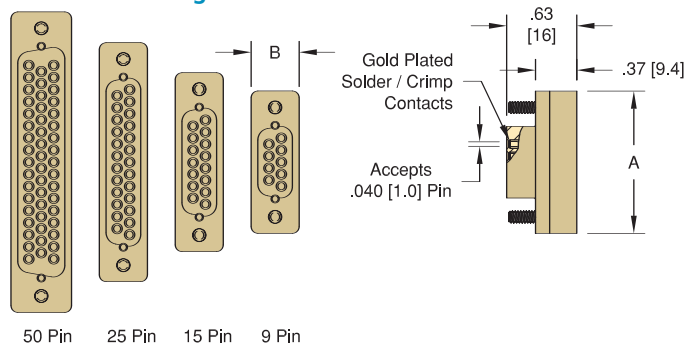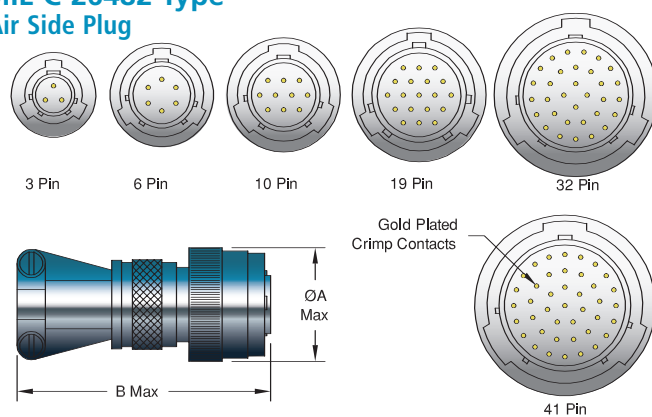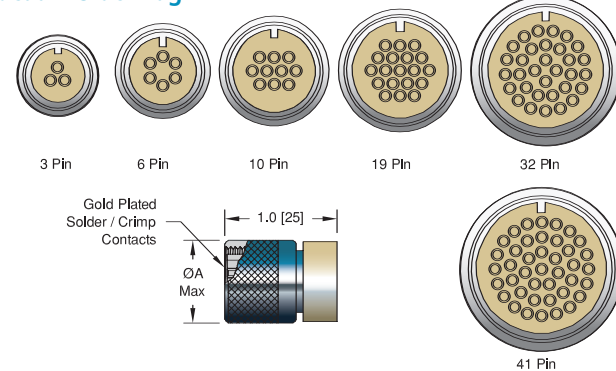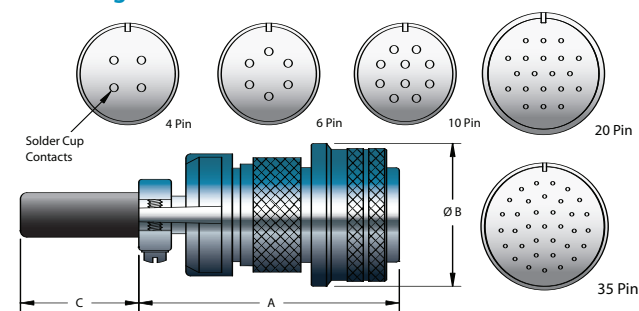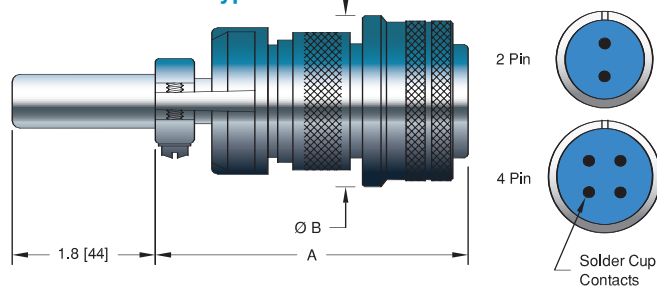[†]Shown in photo.

**MIL-DTL-83513 – Micro D Type
Air Side Plug****Vacuum Side Plug – PEEK****MIL-C-24308 – Sub D Type
Air Side Plug****Vacuum Side Plug – PEEK****MIL-C-26482 Type
Air Side Plug****Vacuum Side Plug – PEEK****MIL-C-5015 Type
Air Side Plug****Power-MIL-C-5015 Type**

Micro D Type



TYPE	VOLTAGE DC	QTY	CONDUCTOR AMPS	MATERIAL	DIMENSIONS A B		TEMPERATURE °C MIN MAX		MAGNETIC MATERIALS	PART NUMBER
Air Side	500 V	9	3	Copper Alloy	0.775 [20]	0.298 [8]	-55	125	No	21585-01-A
Air Side	500 V	15	3	Copper Alloy	0.925 [23]	0.298 [8]	-55	125	No	21586-01-A
Air Side	500 V	25	3	Copper Alloy	1.175 [30]	0.298 [8]	-55	125	No	21587-01-A†
Air Side	500 V	51	3	Copper Alloy	1.425 [36]	0.341 [9]	-55	125	No	21589-01-A
Vacuum Side	500 V	9	2	Beryllium Copper	0.790 [20]	0.390 [10]	-269	200	No	21573-01-A
Vacuum Side	500 V	15	2	Beryllium Copper	0.935 [24]	0.390 [10]	-269	200	No	21574-01-A
Vacuum Side	500 V	25	2	Beryllium Copper	1.185 [30]	0.390 [10]	-269	200	No	21575-01-A
Vacuum Side	500 V	51	2	Beryllium Copper	1.135 [36]	0.390 [10]	-269	200	No	21577-01-A

Sub D Type



TYPE	VOLTAGE DC	QTY	CONTACTS AMPS	MATERIAL	DIMENSIONS A B C			TEMPERATURE °C MIN MAX		MAGNETIC MATERIALS	PART NUMBER
Air Side	500 V	9	5	Copper Alloy	1.7 [43]	1.2 [31]	0.6 [15]	-55	105	Yes	18076-01-A
Air Side	500 V	15	5	Copper Alloy	1.6 [41]	1.6 [41]	0.6 [15]	-55	105	Yes	18076-02-A
Air Side	500 V	25	5	Copper Alloy	1.9 [48]	2.2 [56]	0.6 [15]	-55	105	Yes	18076-03-A†
Air Side	500 V	50	5	Copper Alloy	2.0 [51]	2.6 [66]	0.7 [18]	-55	105	Yes	18076-04-A
Vacuum Side-Female	500 V	9	5	Copper Alloy	1.3 [33]	0.4 [11]	-	-200	200	No	16810-01-A
Vacuum Side-Female	500 V	15	5	Copper Alloy	1.6 [40]	0.4 [11]	-	-200	200	No	16811-01-A
Vacuum Side-Female	500 V	25	5	Copper Alloy	2.2 [55]	0.4 [11]	-	-200	200	No	16812-01-A†
Vacuum Side-Female	500 V	50	5	Copper Alloy	2.7 [69]	0.5 [14]	-	-200	200	No	16814-01-A
Vacuum Side-Male	500 V	9	5	Copper Alloy	1.3 [33]	0.4 [11]	-	-200	200	No	19827-01-A
Vacuum Side-Male	500 V	15	5	Copper Alloy	1.6 [40]	0.4 [11]	-	-200	200	No	19828-01-A
Vacuum Side-Male	500 V	25	5	Copper Alloy	2.2 [55]	0.4 [11]	-	-200	200	No	17411-01-A
Vacuum Side-Male	500 V	50	5	Copper Alloy	2.7 [69]	0.5 [14]	-	-200	200	No	19829-01-A

MIL-C-26482 Type



TYPE	VOLTAGE DC	QTY	CONTACTS AMPS	MATERIAL	DIMENSIONS A B		TEMPERATURE °C MIN MAX		MAGNETIC MATERIALS	PART NUMBER
Air Side	1 kV	3	1	Copper Alloy	0.8 [20]	1.9 [48]	-55	200	No	16060-01-A†
Air Side	1 kV	6	1	Copper Alloy	1.0 [25]	1.9 [48]	-55	200	No	16060-02-A
Air Side	1 kV	10	1	Copper Alloy	1.0 [25]	1.9 [48]	-55	200	No	16060-03-A
Air Side	1 kV	19	1	Copper Alloy	1.2 [31]	1.9 [48]	-55	200	No	16060-04-A
Air Side	1 kV	32	1	Copper Alloy	1.4 [36]	2.1 [53]	-55	200	No	16060-05-A
Air Side	1 kV	41	1	Copper Alloy	1.5 [38]	2.3 [58]	-55	200	No	16060-06-A
Vacuum Side	1 kV	3	5	Copper Alloy	0.8 [20]	-	-200	200	No	16026-02-A†
Vacuum Side	1 kV	6	5	Copper Alloy	0.9 [22]	-	-200	200	No	16027-02-A
Vacuum Side	1 kV	10	5	Copper Alloy	1.0 [25]	-	-200	200	No	16028-02-A
Vacuum Side	1 kV	19	5	Copper Alloy	1.1 [28]	-	-200	200	No	16029-02-A
Vacuum Side	1 kV	32	5	Copper Alloy	1.4 [34]	-	-200	200	No	16030-02-A
Vacuum Side	1 kV	41	5	Copper Alloy	1.5 [37]	-	-200	200	No	16031-02-A

MIL-C-5015 Type




TYPE	VOLTAGE DC	QTY	CONTACTS AMPS	MATERIAL	DIMENSIONS A B C			TEMPERATURE °C MIN MAX		MAGNETIC MATERIALS	PART NUMBER
Air Side	700 V	4	13	Copper Alloy	2.6 [65]	1.4 [36]	1.8 [44]	-55	125	No	15910-01-A
Air Side	700 V	6	13	Copper Alloy	2.6 [65]	1.4 [36]	1.8 [44]	-55	125	No	15911-01-A
Air Side	700 V	10	13	Copper Alloy	2.6 [65]	1.4 [36]	1.8 [44]	-55	125	No	15912-01-A
Air Side	700 V	20	13	Copper Alloy	2.9 [74]	1.9 [49]	1.4 [36]	-55	125	No	15913-01-A†
Air Side	700 V	35	13	Copper Alloy	3.0 [77]	2.5 [62]	1.2 [30]	-55	125	No	15914-01-A
Air Side: Hi-Temp PEEK	700 V	4	4.8	Alumel	2.6 [65]	1.4 [36]	1.8 [44]	-55	260	Yes	15910-32-A
Air Side: Hi-Temp PEEK	700 V	6	4.8	Alumel	2.6 [65]	1.4 [36]	1.8 [44]	-55	260	Yes	15911-32-A
Air Side: Hi-Temp PEEK	700 V	10	4.8	Alumel	2.6 [65]	1.4 [36]	1.8 [44]	-55	260	Yes	15912-32-A
Power: .094 Contacts	700 V	2	23	Copper Alloy	2.5 [63]	1.2 [32]	-	-55	125	No	18600-01-A
Power: .094 Contacts	700 V	4	23	Copper Alloy	2.5 [63]	1.4 [36]	-	-55	125	No	18600-02-A
Power: .142 Contacts	700 V	2	46	Copper Alloy	2.6 [65]	1.6 [40]	-	-55	125	No	18601-01-A
Power: .142 Contacts	700 V	4	46	Copper Alloy	2.6 [65]	1.6 [40]	-	-55	125	No	18601-02-A


Note that contacts are included with all plugs. †Shown in photo.



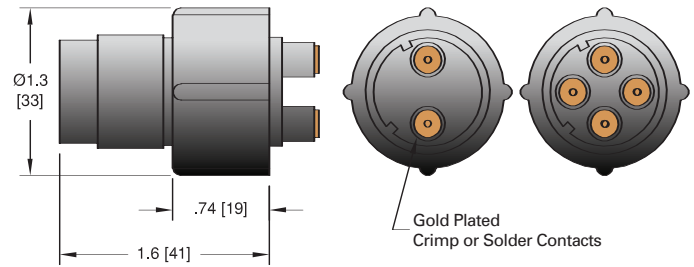
High Voltage 2 & 4 Contacts




7 Contacts

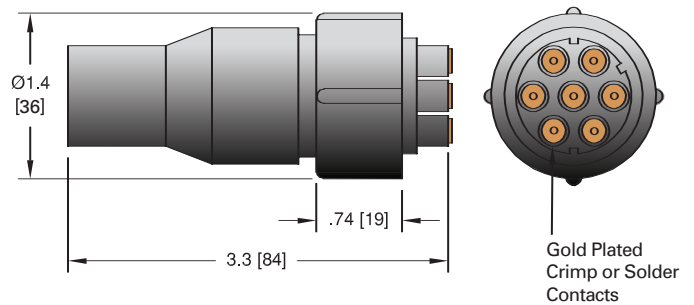

Thermocouple Spade Type



Thermocouple MIL-C-5015 Type

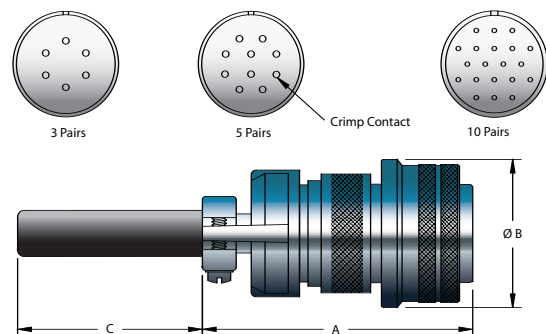

High Voltage



TYPE	VOLTAGE DC	QTY	CONTACTS AMPS	MATERIAL	TEMPERATURE °C		MAGNETIC MATERIALS	PART NUMBER
Air Side	12 kV	2	13	Copper Alloy	-15	85	No	2871-02-A [†]
Air Side	12 kV	4	13	Copper Alloy	-15	85	No	2871-03-A
Air Side	12 kV	7	13	Copper Alloy	-15	85	No	2871-01-A

Thermocouple
Spade Type


ANSI TYPE	THERMOCOUPLE MATERIALS	TYPE	PLUG MATERIALS	TEMPERATURE °C		COLOR CODE	MAGNETIC MATERIALS	PART NUMBER
K	Chromel/Alumel	Standard	Glass Filled Nylon	-29	218	Yellow	Yes	08151-01 [†]
K	Chromel/Alumel	High Temp	Ceramic	-73	650	Yellow	Yes	08151-09
C	Tungsten - Rhenium	Standard	Glass Filled Nylon	-29	218	Red	Yes	08151-04
C	Tungsten - Rhenium	High Temp	Ceramic	-73	250	Red	Yes	08151-07

Thermocouple
MIL-C-5015 Type


ANSI TYPE	T/C PAIRS	THERMOCOUPLE MATERIALS	DIMENSIONS			TEMPERATURE °C		MAGNETIC MATERIALS	PART NUMBER
			A	B	C				
K	3	Chromel/Alumel	2.6 [65]	1.4 [36]	1.8 [44]	-55	125	Yes	15911-02-A
K	5	Chromel/Alumel	2.6 [65]	1.4 [36]	1.8 [44]	-55	125	Yes	15912-02-A
K	10	Chromel/Alumel	2.9 [74]	1.9 [49]	1.4 [36]	-55	125	Yes	15913-02-A [†]

Note that contacts are included with all plugs. [†]Shown in photo.

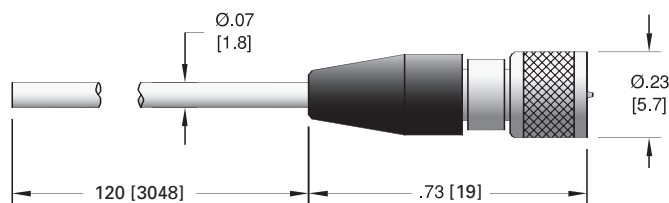
Microdot




SMB

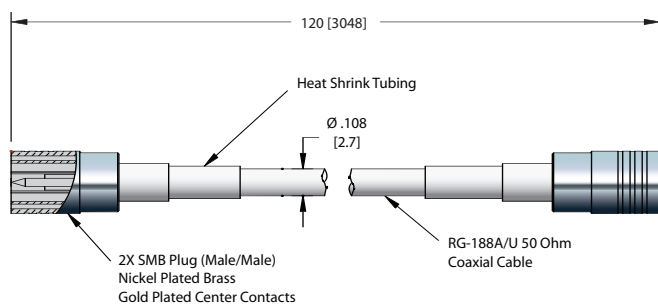


SMA

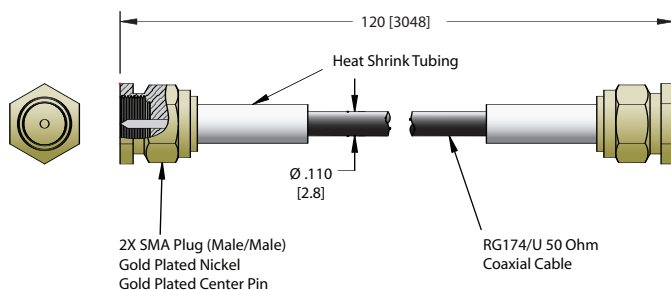


BNC

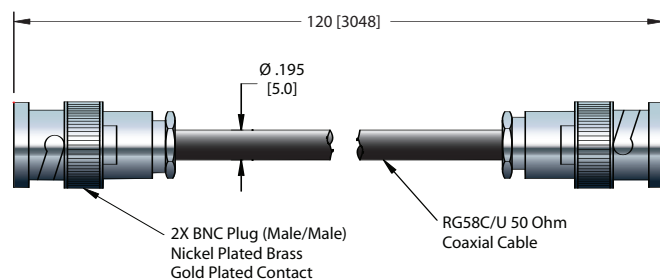


MHV

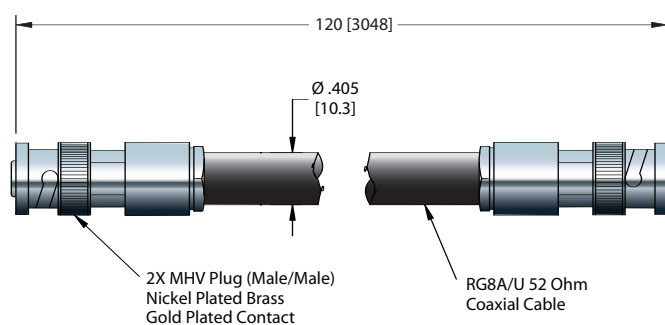

Type N

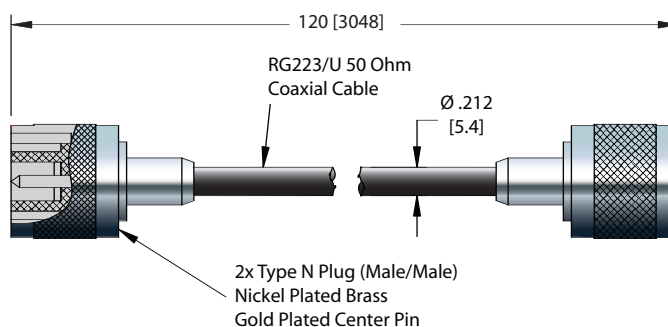

SHV – 5 KV

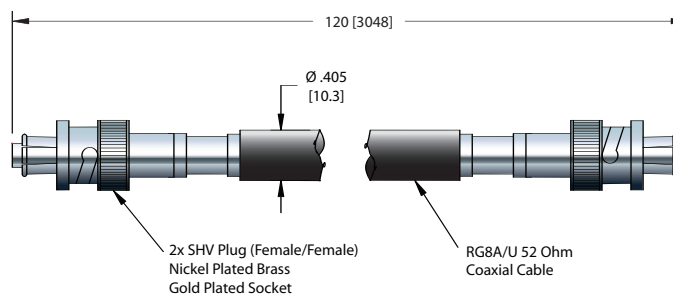

Single Ended
Microdot

TYPE	CABLE	CABLE LENGTH	VOLTAGE DC	CONDUCTOR AMPS	TEMPERATURE °C MIN	TEMPERATURE °C MAX	PART NUMBER
Microdot	RG196A/U	10'	1 kV	2	-65	125	14544-01-A

Double Ended
SMB

50 Ohm SMB	RG188A/U	10'	500 V	2	-70	200	21618-01-A
------------	----------	-----	-------	---	-----	-----	------------

Double Ended
SMA

50 Ohm SMA	RG174/U	10'	500 V	5	-45	75	21617-01-A
------------	---------	-----	-------	---	-----	----	------------

Double Ended
BNC

50 Ohm BNC	RG58C/U	10'	500 V	5	-40	85	18921-01-A
------------	---------	-----	-------	---	-----	----	------------

Double Ended
MHV

52 Ohm MHV	RG8A/U	10'	5 kV	10	-55	85	18921-02-A
------------	--------	-----	------	----	-----	----	------------


Double Ended
Type N

50 Ohm Type N	RG223/U	10'	1.5 kV	5	-40	60	21619-01-A
---------------	---------	-----	--------	---	-----	----	------------


Double Ended
SHV – 5 KV

52 Ohm SHV	RG8A/U	10'	5 kV	10	-55	85	18921-03-A
------------	--------	-----	------	----	-----	----	------------

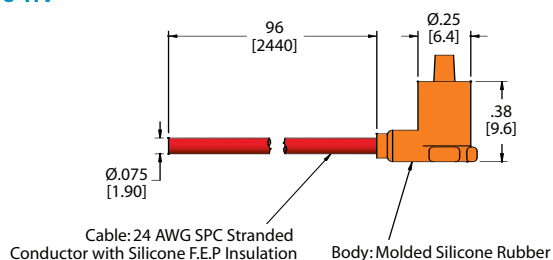
Micro HV




Mini HV

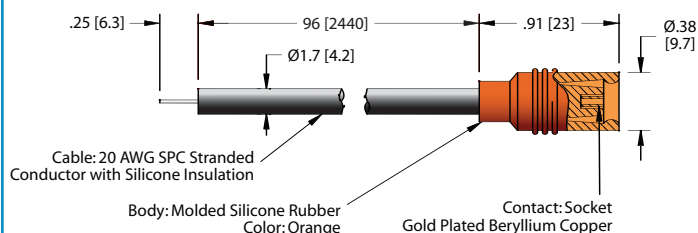


10 kV Power Plug

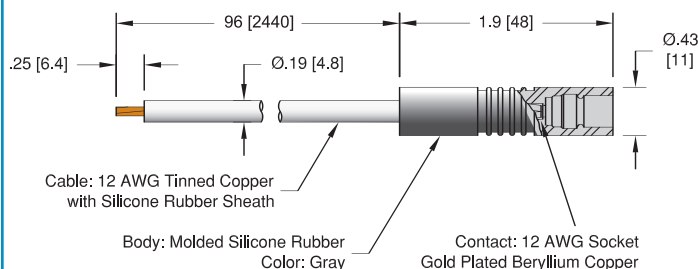


20 KV Power Plug

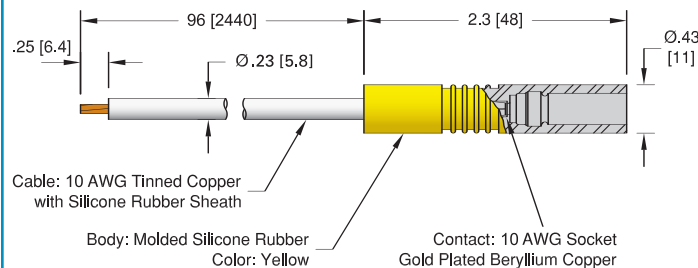


.154 Power Plug

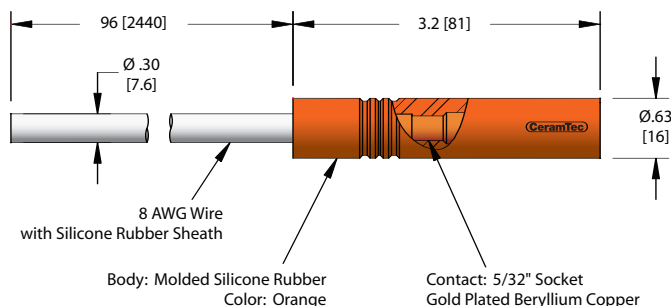


.250 Power Plug

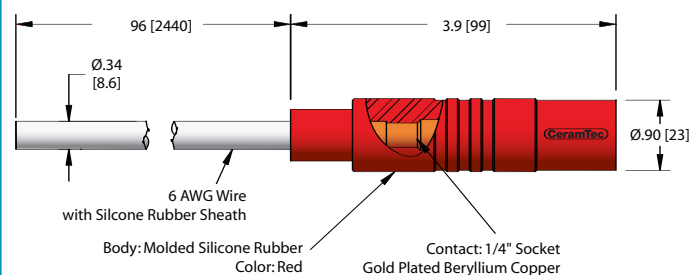

High Voltage – 40 KV

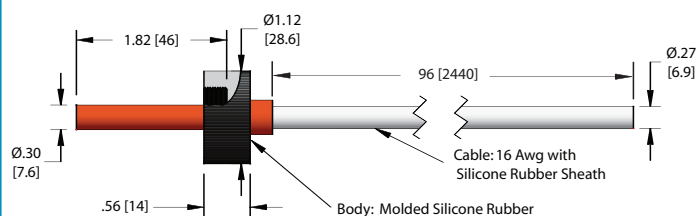

High Voltage – 50 KV

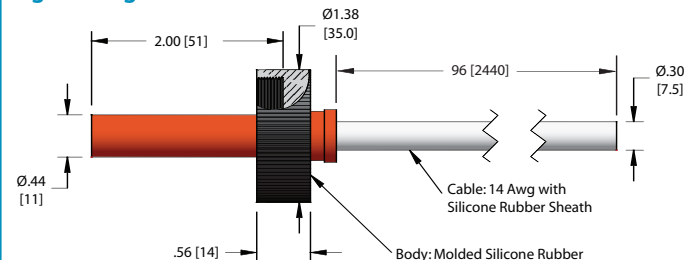

Micro HV



TYPE	CABLE TYPE	LENGTH	VOLTAGE DC	CONDUCTOR AMPS	TEMPERATURE °C		PART NUMBER
Micro HV	24 AWG	8'	10 kV	3	-55°C	125°C	21039-01-A

Mini HV



Mini HV	20 AWG	8'	15 kV	7.5	-55°C	125°C	21119-01-A
---------	--------	----	-------	-----	-------	-------	------------









Power Plug




10 kV Power Plug	12 AWG	8'	10 kV	30	-55°C	125°C	14418-02-A
20 kV Power Plug	10 AWG	8'	20 kV	55	-55°C	125°C	14419-02-A
.154 Power Plug	8 AWG	8'	10 kV	75	-55°C	125°C	21094-01-A
.250 Power Plug	6 AWG	8'	25 kV	100	-55°C	125°C	20956-02-A


High Voltage
40 & 50 kV

40 kV Air Side	16 AWG	8'	40 kV	10	-55°C	125°C	21034-01-A
50 kV Air Side	14 AWG	8'	50 kV	10	-55°C	125°C	21112-01-A

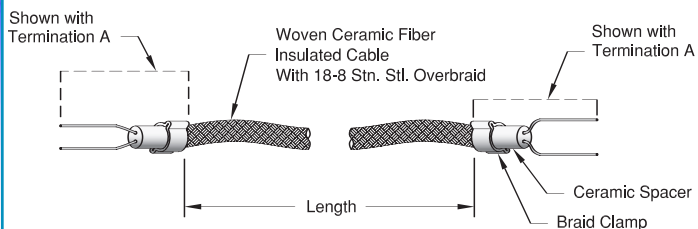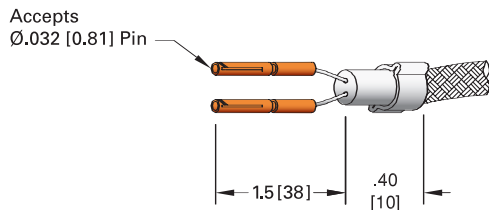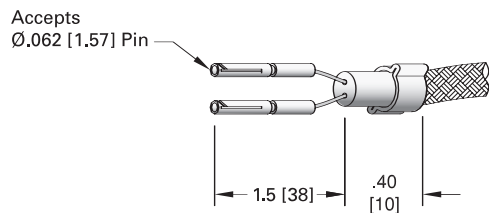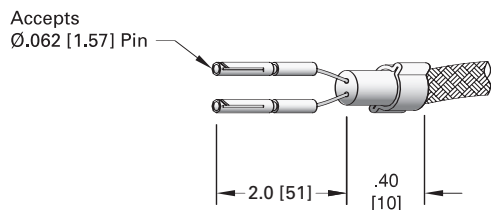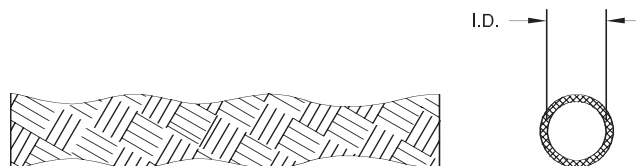**Duplex Shielded
.030 [0.76] Dia. Conductor****Termination A – Bare Conductor****Termination B – Thermocouple Bead****Termination C – BeCu Contacts****Termination D – Nickel Contacts****Termination E – Chromel/Alumel Contacts****Cable Components
Beads****Conductor****Braid**

Duplex Shielded
Two Conductors

VOLTAGE DC	TERMINATION			CONDUCTOR AMPS	CONDUCTOR MATERIAL	CONTACT MATERIAL	TEMPERATURE°C		MAGNETIC MATERIALS	PART NUMBER
	END 1	END 2	LENGTH				MIN	MAX		
500 V	A	A	12"	15	Copper/Copper	-	-269	650	No	18682-12-AA
500 V	A	C	12"	15	Copper/Copper	BeCu	-269	200	No	18682-12-AC
500 V	A	D	12"	15	Copper/Copper	Nickel Alloy	-200	400	Yes	18682-12-AD
500 V	C	C	12"	15	Copper/Copper	BeCu	-269	200	No	18682-12-CC
500 V	D	D	12"	15	Copper/Copper	Nickel Alloy	-200	400	Yes	18682-12-DD
500 V	A	A	24"	15	Copper/Copper	-	-269	650	No	18682-24-AA
500 V	A	C	24"	15	Copper/Copper	BeCu	-269	200	No	18682-24-AC
500 V	A	D	24"	15	Copper/Copper	Nickel Alloy	-200	400	Yes	18682-24-AD
500 V	C	C	24"	15	Copper/Copper	BeCu	-269	200	No	18682-24-CC
500 V	D	D	24"	15	Copper/Copper	Nickel Alloy	-200	400	Yes	18682-24-DD
500 V	A	A	36"	15	Copper/Copper	-	-269	650	No	18682-36-AA
500 V	A	C	36"	15	Copper/Copper	BeCu	-269	200	No	18682-36-AC
500 V	A	D	36"	15	Copper/Copper	Nickel Alloy	-200	400	Yes	18682-36-AD
500 V	C	C	36"	15	Copper/Copper	BeCu	-269	200	No	18682-36-CC
500 V	D	D	36"	15	Copper/Copper	Nickel Alloy	-200	400	Yes	18682-36-DD

Duplex Shielded
Thermocouple

VOLTAGE DC	TERMINATION			ANSI TYPE	CONDUCTOR/CONTACT MATERIAL	TEMPERATURE°C		MAGNETIC MATERIALS	PART NUMBER
	END 1	END 2	LENGTH			MIN	MAX		
500 V	A	A	12"	K	Chromel/Alumel	-269	650	Yes	18684-12-AA
500 V	A	B	12"	K	Chromel/Alumel	-200	650	Yes	18684-12-AB
500 V	A	E	12"	K	Chromel/Alumel	-269	350	Yes	18684-12-AE
500 V	E	E	12"	K	Chromel/Alumel	-269	350	Yes	18684-12-EE
500 V	A	A	24"	K	Chromel/Alumel	-269	650	Yes	18684-24-AA
500 V	A	B	24"	K	Chromel/Alumel	-200	650	Yes	18684-24-AB
500 V	A	E	24"	K	Chromel/Alumel	-269	350	Yes	18684-24-AE
500 V	E	E	24"	K	Chromel/Alumel	-269	350	Yes	18684-24-EE
500 V	A	A	36"	K	Chromel/Alumel	-269	650	Yes	18684-36-AA
500 V	A	B	36"	K	Chromel/Alumel	-200	650	Yes	18684-36-AB
500 V	A	E	36"	K	Chromel/Alumel	-269	350	Yes	18684-36-AE
500 V	E	E	36"	K	Chromel/Alumel	-269	350	Yes	18684-36-EE

Beads



MATERIAL	A	DIMENSIONS		C	BEADS PER FOOT	TEMPERATURE°C		PART NUMBER
		B				MIN	MAX	
96% Min Alumina	0.056 [1.42]	0.110 [2.79]	0.110 [2.79]	120	-269	800		07424-01
Steatite Grade L3	0.068 [1.73]	0.170 [4.32]	0.170 [4.32]	84	-269	600		07424-03
Steatite Grade L3	0.087 [2.21]	0.180 [4.57]	0.100 [2.54]	120	-269	600		07424-06
Steatite Grade L3	0.092 [2.34]	0.200 [5.08]	0.200 [5.08]	72	-269	600		07424-02

Conductor










DIAMETER	CONDUCTOR MATERIAL	AMPS	PART NUMBER
0.032 [0.81]	Copper	16	18745-01
0.036 [0.91]	Zirconium Copper	17	18745-02
0.050 [1.3]	Nickel	8.2	18745-03
0.050 [1.3]	Zirconium Copper	30	18745-04
0.050 [1.3]	Copper	27	18745-05

Braid



BRAID INSIDE DIAMETER	PART NUMBER
0.125 [3.18]	18746-01
0.250 [6.35]	18746-02

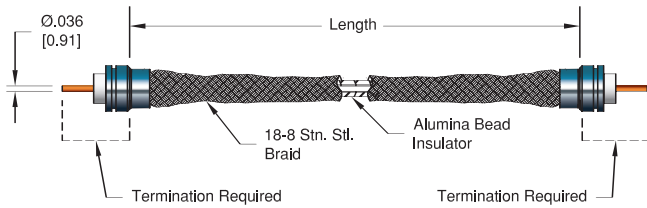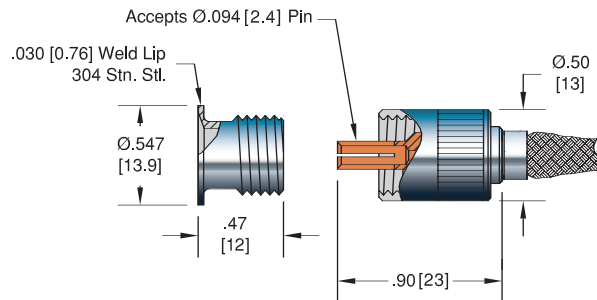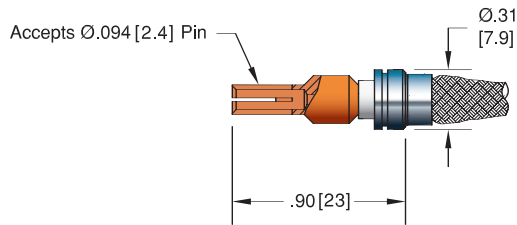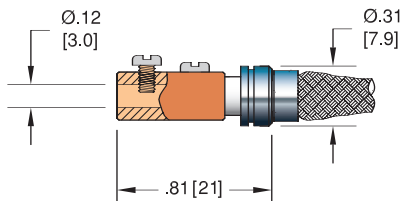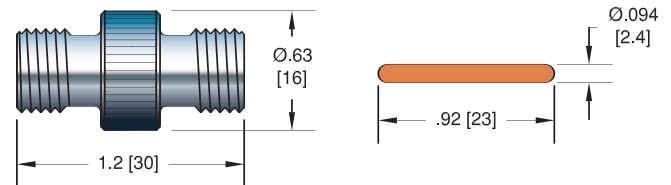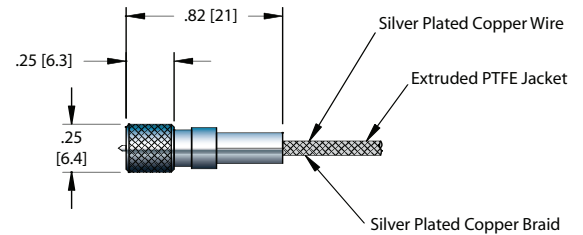**Coaxial: 1/8" Diameter
.036 [0.91] Dia. Conductor****Termination A – Coaxial****Termination B – Contact****Termination C – In-Line****Termination – BNC & MHV****1/8" Cable Splice****Microdot**

Coaxial Cables
1/8" Diameter

VOLTAGE DC	TERMINATION END 1	TERMINATION END 2	LENGTH	AMPS	CONDUCTOR MATERIAL	TEMPERATURE°C MIN	TEMPERATURE°C MAX	MAGNETIC MATERIALS	PART NUMBER
1.5 V	A	A	12"	15	Zirconium Copper	-269	200	No	18680-12-AA
1.5 V	A	B	12"	15	Zirconium Copper	-269	200	No	18680-12-AB
1.5 V	A	C	12"	15	Zirconium Copper	-269	200	No	18680-12-AC
1.5 V	A	BNC	12"	15	Zirconium Copper	-269	200	No	18680-12-AE
1.5 V	A	MHV	12"	15	Zirconium Copper	-269	200	No	18680-12-AF
1.5 V	B	B	12"	15	Zirconium Copper	-269	200	No	18680-12-BB
1.5 V	B	C	12"	15	Zirconium Copper	-269	200	No	18680-12-BC
1.5 V	C	C	12"	15	Zirconium Copper	-269	350	No	18680-12-CC
1.5 V	A	A	24"	15	Zirconium Copper	-269	200	No	18680-24-AA
1.5 V	A	B	24"	15	Zirconium Copper	-269	200	No	18680-24-AB
1.5 V	A	C	24"	15	Zirconium Copper	-269	200	No	18680-24-AC
1.5 V	A	BNC	24"	15	Zirconium Copper	-269	400	No	18680-24-AE
1.5 V	A	MHV	24"	15	Zirconium Copper	-269	200	No	18680-24-AF
1.5 V	B	B	24"	15	Zirconium Copper	-269	400	No	18680-24-BB
1.5 V	B	C	24"	15	Zirconium Copper	-269	400	No	18680-24-BC
1.5 V	C	C	24"	15	Zirconium Copper	-269	350	No	18680-24-CC
1.5 V	A	A	36"	15	Zirconium Copper	-269	200	No	18680-36-AA
1.5 V	A	B	36"	15	Zirconium Copper	-269	200	No	18680-36-AB
1.5 V	A	C	36"	15	Zirconium Copper	-269	200	No	18680-36-AC
1.5 V	A	BNC	36"	15	Zirconium Copper	-269	400	No	18680-36-AE
1.5 V	A	MHV	36"	15	Zirconium Copper	-269	200	No	18680-36-AF
1.5 V	B	B	36"	15	Zirconium Copper	-269	400	No	18680-36-BB
1.5 V	B	C	36"	15	Zirconium Copper	-269	400	No	18680-36-BC
1.5 V	C	C	36"	15	Zirconium Copper	-269	350	No	18680-36-CC

Cable Splice



SIZE	VOLTAGE DC	AMPS	CONDUCTOR MATERIAL	TEMPERATURE°C MIN	TEMPERATURE°C MAX	MAGNETIC MATERIALS	PART NUMBER
1/8"	1.5 kV	15	Copper	-269	400	No	18727-01-A


Microdot Cable
Assembly

VOLTAGE DC	TERMINATION END 1	TERMINATION END 2	LENGTH	AMPS	CONDUCTOR MATERIAL	TEMPERATURE°C MIN	TEMPERATURE°C MAX	MAGNETIC MATERIALS	PART NUMBER
500 V	Microdot	Microdot	12"	2	Silver Plated Copper	-65	125	No	15767-12-A
500 V	Microdot	Microdot	24"	2	Silver Plated Copper	-65	125	No	15767-24-A
500 V	Microdot	Microdot	36"	2	Silver Plated Copper	-65	125	No	15767-36-A†


†Shown in photo.



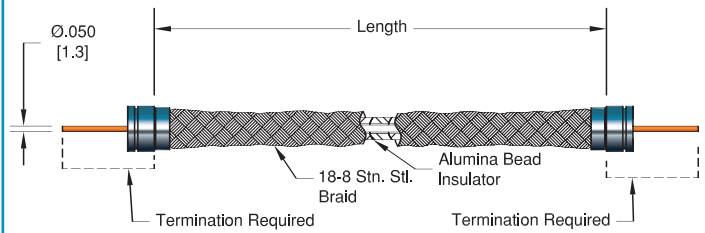
Coaxial: 1/4" Diameter .050 [1.3] Dia. Conductor




Termination A – Coaxial

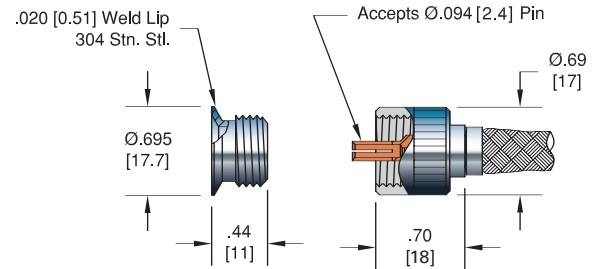


Termination B – Contact




Termination C – In-Line



Termination – BNC & MHV



1/4" Cable Splice

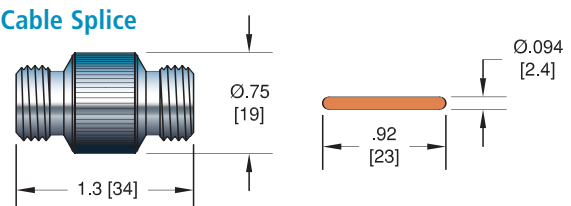

Coaxial Cables
1/4" Diameter

VOLTAGE DC	TERMINATION END 1	TERMINATION END 2	LENGTH	AMPS	CONDUCTOR MATERIAL	TEMPERATURE °C MIN	TEMPERATURE °C MAX	MAGNETIC MATERIALS	PART NUMBER
3 kV	A	A	12"	25	Zirconium Copper	-269	200	No	18681-12-AA
3 kV	A	B	12"	25	Zirconium Copper	-269	200	No	18681-12-AB
3 kV	A	C	12"	25	Zirconium Copper	-269	200	No	18681-12-AC
3 kV	A	BNC	12"	25	Zirconium Copper	-269	200	No	18681-12-AE
3 kV	A	MHV	12"	25	Zirconium Copper	-269	200	No	18681-12-AF
3 kV	B	B	12"	25	Zirconium Copper	-269	200	No	18681-12-BB
3 kV	B	C	12"	25	Zirconium Copper	-269	200	No	18681-12-BC
3 kV	C	C	12"	25	Zirconium Copper	-269	350	No	18681-12-CC
3 kV	BNC	BNC	12"	25	Zirconium Copper	-269	350	No	18681-12-EE
3 kV	MHV	MHV	12"	25	Zirconium Copper	-269	350	No	18681-12-FF
3 kV	A	A	24"	25	Zirconium Copper	-269	200	No	18681-24-AA
3 kV	A	B	24"	25	Zirconium Copper	-269	200	No	18681-24-AB
3 kV	A	C	24"	25	Zirconium Copper	-269	200	No	18681-24-AC
3 kV	A	BNC	24"	25	Zirconium Copper	-269	200	No	18681-24-AE
3 kV	A	MHV	24"	25	Zirconium Copper	-269	200	No	18681-24-AF
3 kV	B	B	24"	25	Zirconium Copper	-269	200	No	18681-24-BB
3 kV	B	C	24"	25	Zirconium Copper	-269	200	No	18681-24-BC
3 kV	C	C	24"	25	Zirconium Copper	-269	350	No	18681-24-CC
3 kV	BNC	BNC	24"	25	Zirconium Copper	-269	350	No	18681-24-EE
3 kV	MHV	MHV	24"	25	Zirconium Copper	-269	350	No	18681-24-FF
3 kV	A	A	36"	25	Zirconium Copper	-269	200	No	18681-36-AA
3 kV	A	B	36"	25	Zirconium Copper	-269	200	No	18681-36-AB
3 kV	A	C	36"	25	Zirconium Copper	-269	200	No	18681-36-AC
3 kV	A	BNC	36"	25	Zirconium Copper	-269	200	No	18681-36-AE
3 kV	A	MHV	36"	25	Zirconium Copper	-269	200	No	18681-36-AF
3 kV	B	B	36"	25	Zirconium Copper	-269	200	No	18681-36-BB
3 kV	B	C	36"	25	Zirconium Copper	-269	200	No	18681-36-BC
3 kV	C	C	36"	25	Zirconium Copper	-269	350	No	18681-36-CC
3 kV	BNC	BNC	36"	25	Zirconium Copper	-269	350	No	18681-36-EE
3 kV	MHV	MHV	36"	25	Zirconium Copper	-269	350	No	18681-36-FF

Cable Splice




SIZE	VOLTAGE DC	AMPS	CONDUCTOR MATERIAL	TEMPERATURE °C MIN	TEMPERATURE °C MAX	MAGNETIC MATERIALS	PART NUMBER
1/4"	3 kV	25	Copper	-269	400	No	18728-01-A


In-Vacuum Ribbon Cable

CeramTec's in-vacuum ribbon cable is designed to complement our Micro D Type (MIL-DTL-83513) & Sub D Type (MIL-C-24308) hermetic multipin connector product lines and therefore cable configurations include 9, 15 or 25 conductor cable. Note that 50 conductor cables are created by using two 25 conductor cables. Each of the Kapton® wrapped stranded 28 AWG (7 x 0.005) or 22 AWG (19 x 0.0063) silver plated copper conductors are woven with a PEEK (polyether ether ketone) monofilament in order to achieve the ribbon cable form. The multistranded wrapped cable offers the most flexible solution and has a temperature range up to 200° C. All ribbon cable assembly materials are ultra-high vacuum (UHV) compatible. The ribbon cables are vacuum baked out prior to shipping. Additional vacuum bakeout is also recommended prior to use. All cable assembly components are sold separately.

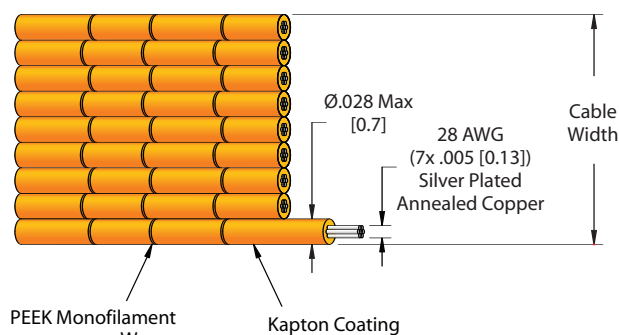
28 AWG Ribbon Cable




22 AWG Ribbon Cable

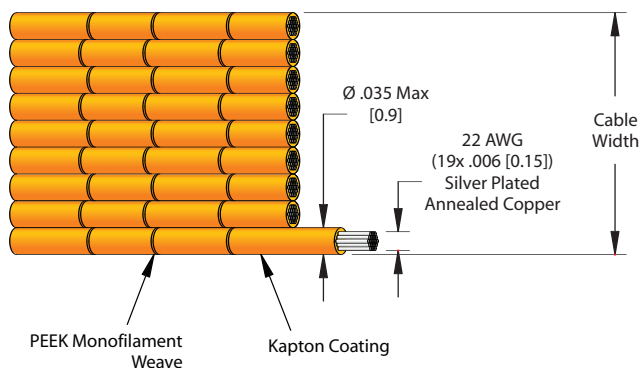


Single Conductor 28 AWG Stranded Wire

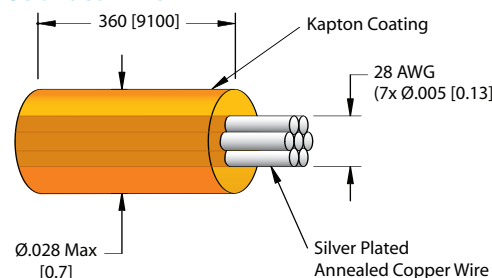

22 AWG Stranded Wire

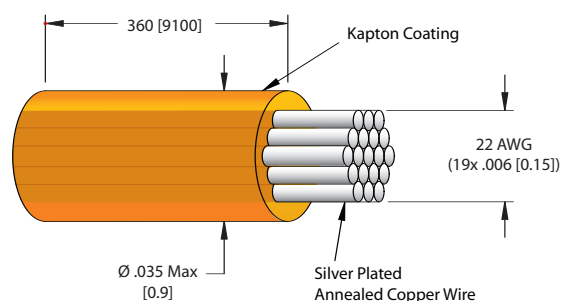

12 AWG Stranded Wire

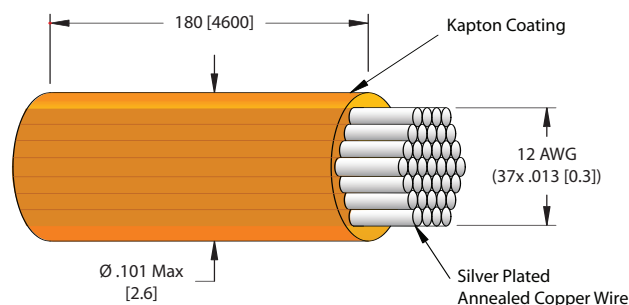

Specifications

Materials

Insulation: Kapton® Type FN
Weave: PEEK (polyether ether ketone) monofilament

Number of Conductors Single, 9, 15, 25

Conductor

28 AWG 7 / 0.005" stranded silver plated copper
22 AWG 19 / 0.0063" stranded silver plated copper
12 AWG 37 / 0.013" stranded silver plated copper

Voltage Rating 600 V AC, 850 V DC

Current Rating

28 AWG - 2.5 Amps per conductor
22 AWG - 5 Amps per conductor
12 AWG - 20 Amps per conductor

Temperature Range -55°C to 200°C

Resistance

28 AWG - 244Ω/km at 20°C max.
22 AWG - 119Ω/km at 20°C max.
12 AWG - 6.2Ω/km at 20°C max.

Single Conductor
28 AWG

VOLTAGE DC	CONDUCTOR AMPS	TYPE	LENGTH	WIRE DIAMETER	INSULATION DIAMETER	PART NUMBER
850 V	2.5	Stranded	30'	7 x 0.005	Ø .028	21621-01-A

Single Conductor
22 AWG

VOLTAGE DC	CONDUCTOR AMPS	TYPE	LENGTH	WIRE DIAMETER	INSULATION DIAMETER	PART NUMBER
850 V	5	Stranded	30'	19 x 0.0063	Ø .035	21643-01-A

Single Conductor
12 AWG

VOLTAGE DC	CONDUCTOR AMPS	TYPE	LENGTH	WIRE DIAMETER	INSULATION DIAMETER	PART NUMBER
850 V	20	Stranded	15'	37 x 0.013	Ø .101	21702-02-A

Ribbon Cable
28 AWG

NO. WIRES	CABLE LENGTH	WIDTH	WIRE DIAMETER	INSULATION DIAMETER	PART NUMBER
9	19"	0.4	7 x 0.005	Ø .028	21622-19-WW
9	39"	0.4	7 x 0.005	Ø .028	21622-39-WW
9	96"	0.4	7 x 0.005	Ø .028	21622-96-WW
15	19"	0.7	7 x 0.005	Ø .028	21623-19-WW
15	39"	0.7	7 x 0.005	Ø .028	21623-39-WW
15	96"	0.7	7 x 0.005	Ø .028	21623-96-WW
25	19"	1.2	7 x 0.005	Ø .028	21624-19-WW
25	39"	1.2	7 x 0.005	Ø .028	21624-39-WW
25	96"	1.2	7 x 0.005	Ø .028	21624-96-WW

Ribbon Cable
22 AWG





NO. WIRES	CABLE LENGTH	WIDTH	WIRE DIAMETER	INSULATION DIAMETER	PART NUMBER
9	19"	0.4	19 X 0.0063	Ø .035	20370-19-WW
9	39"	0.4	19 X 0.0063	Ø .035	20370-39-WW
9	96"	0.4	19 X 0.0063	Ø .035	20370-96-WW
15	19"	0.7	19 X 0.0063	Ø .035	20371-19-WW
15	39"	0.7	19 X 0.0063	Ø .035	20371-39-WW
15	96"	0.7	19 X 0.0063	Ø .035	20371-96-WW
25	19"	1.2	19 X 0.0063	Ø .035	20372-19-WW
25	39"	1.2	19 X 0.0063	Ø .035	20372-39-WW
25	96"	1.2	19 X 0.0063	Ø .035	20372-96-WW

Note that 50 conductor cables are created by using two 25 conductor cables.

Wire Stripper



DESCRIPTION	PART NUMBER
Adjustable wire stripper, 20-30 AWG (.25 - .80mm)	21128-01

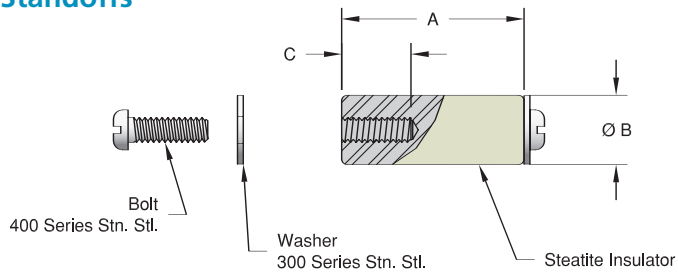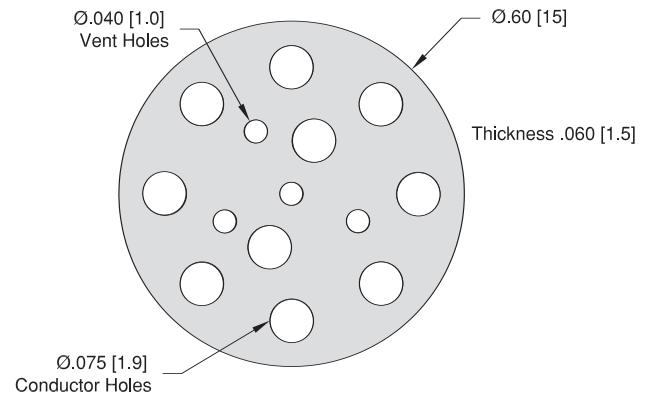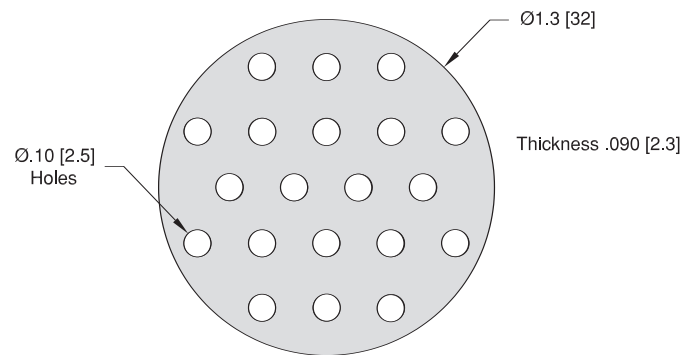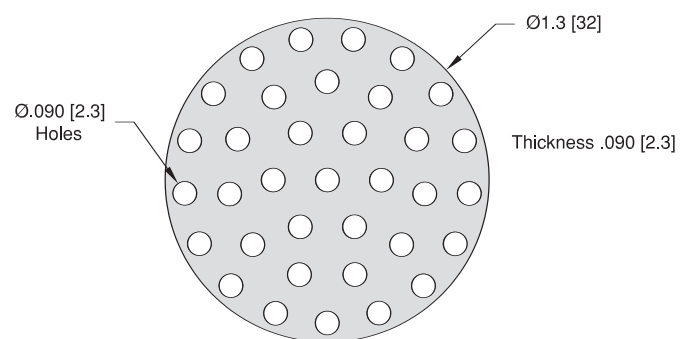Standoffs**Ceramic Spacers****Number of Conductor Holes: 10****Number of Conductor Holes: 20****Number of Conductor Holes: 35**

Standoffs
Steatite

THREAD SIZE	VOLTAGE		A	DIMENSIONS		C	TEMPERATURE °C		PART NUMBER
	DC (Vac)	DC (Air)		B			MIN	MAX	
6 – 32	10 kV	4 kV	0.50 [12.7]	0.38 [9.7]		0.16 [4.1]	-200	400	10420-01-A
8 – 32	12 kV	5 kV	0.63 [16.0]	0.50 [12.7]		0.19 [4.8]	-200	400	10420-03-A
6 – 32	20 kV	8 kV	1.00 [25.4]	0.38 [9.7]		0.38 [9.7]	-200	400	10420-02-A
8 – 32	20 kV	8 kV	1.00 [25.4]	0.50 [12.7]		0.38 [9.7]	-200	400	10420-04-A
10 – 32	20 kV	8 kV	1.00 [25.4]	0.75 [19.0]		0.38 [9.7]	-200	400	10420-06-A
1/4 – 20	25 kV	10 kV	1.25 [31.8]	1.00 [25.4]		0.44 [11]	-200	400	10420-08-A
8 – 32	35 kV	14 kV	2.00 [50.8]	0.50 [12.7]		0.38 [9.7]	-200	400	10420-05-A
10 – 32	35 kV	14 kV	2.00 [50.8]	0.75 [19.0]		0.38 [9.7]	-200	400	10420-07-A
1/4 – 20	40 kV	16 kV	2.50 [63.5]	1.00 [25.4]		0.63 [16]	-200	400	10420-09-A

Ceramic Spacers
Alumina

NO. CONDUCTOR HOLES	TEMPERATURE °C		PART NUMBER
	MIN	MAX	
10	-269	800	3116-01-X
20	-269	800	1984-01-A
35	-269	800	10206-01


ConFlat Flanges
Size: 1 1/3" (NW16CF)

Figure 1

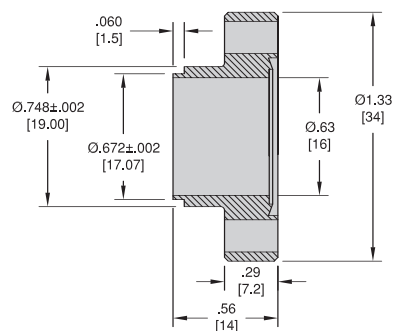


Figure 2

Size: 2 3/4" (NW35CF)

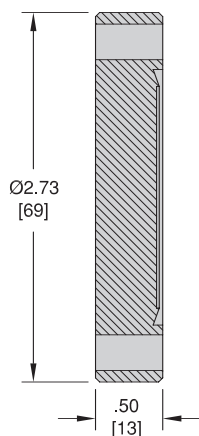


Figure 3

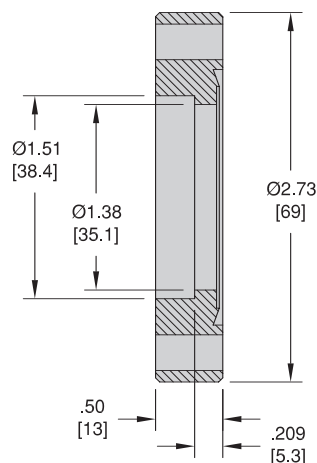


Figure 4

Size: 3 3/8" (NW50CF) & 4 1/2" (NW63CF)

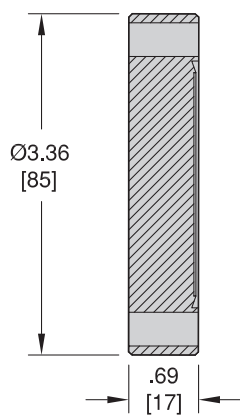


Figure 5

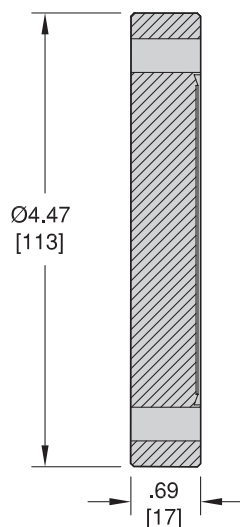


Figure 6

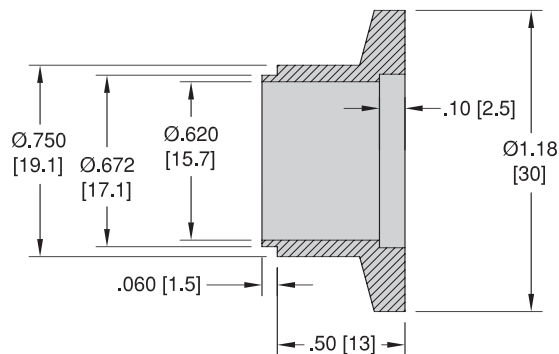
ISO KF Flanges
Type: Ported Weld Neck

Figure 7

Type: Blank

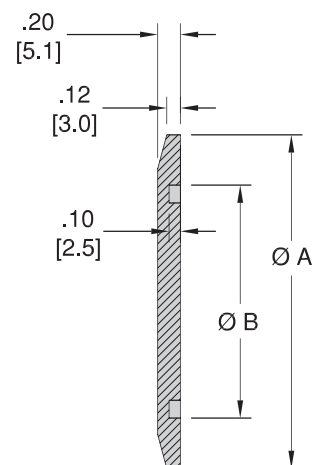


Figure 8

ConFlat



FLANGE CONFLAT	TYPE	FIGURE NUMBER	TEMPERATURE °C		PART NUMBER	PRICE
MIN	MAX					
1 1/3" (NW16CF)	Blank	1	-269	450	6463-01	
1 1/3" (NW16CF)	Ported Weld Neck	2	-269	450	6863-01	
2 3/4" (NW35CF)	Blank	3	-269	450	02899-01	
2 3/4" (NW35CF)	Ported	4	-269	450	02899-02	
3 3/8" (NW50CF)	Blank	5	-269	450	02899-13	
4 1/2" (NW63CF)	Blank	6	-269	450	02899-03	

ISO KF



FLANGE ISO	TYPE	FIGURE	DIMENSIONS		TEMPERATURE °C		PART NUMBER	PRICE
A	B		MIN	MAX	MIN	MAX		
NW16KF	Ported Weld Neck	7	.50 [13]	1.8 [30]	-25	205	17669-01	
NW16KF	Blank	8	1.18 [30]	0.68 [17.3]	-25	205	13499-02	
NW25KF	Blank	8	1.57 [40]	1.03 [26.2]	-25	205	13499-03	
NW40KF	Blank	8	2.16 [55]	1.62 [41.0]	-25	205	13499-04	
NW50KF	Blank	8	2.95 [75]	2.06 [52.3]	-25	205	13499-05	