

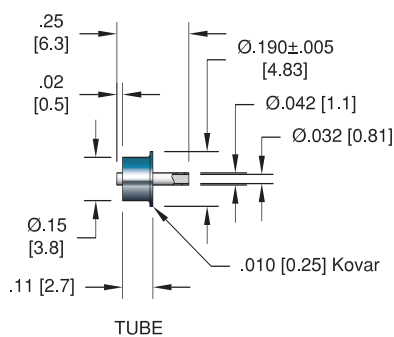



## Weld/Braze - Superthru

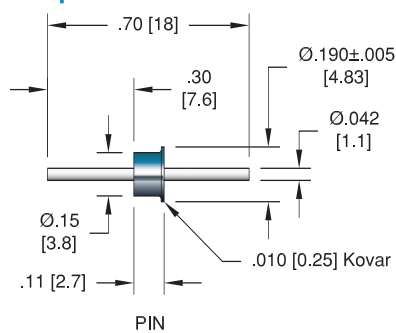


## Weldable - One Conductor

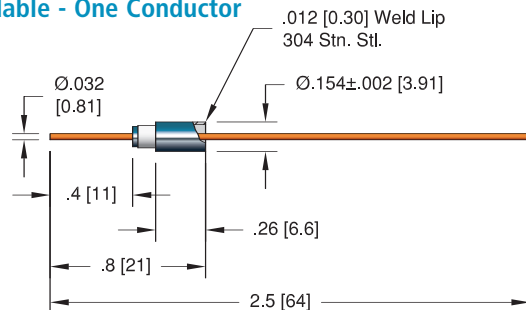


## Weldable - 2, 4, &amp; 8 Conductor

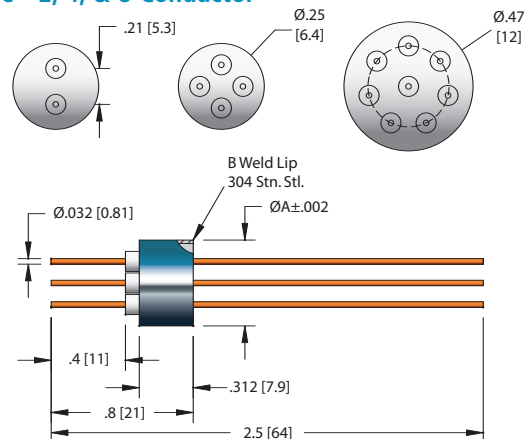

## ISO KF - 2, 4, &amp; 8 Conductor

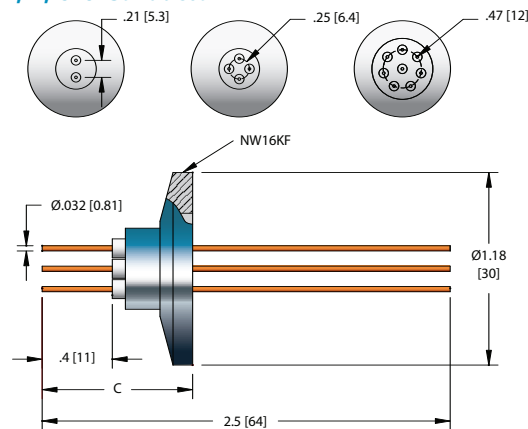

## ConFlat - 2, 4, &amp; 8 Conductor

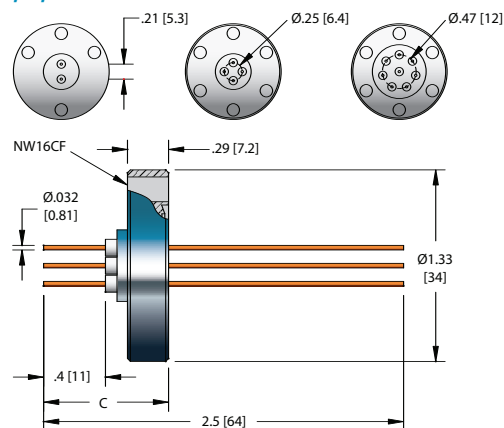

## Specifications — Superthru

## Materials

Housing: Kovar  
Pin/Tube: Pin-Molybdenum, Tube-Kovar  
Insulation: Alumina ceramic  
Magnetic Materials: Yes

**Voltage Rating** 500 V DC

**Current Rating** See table

**Temperature Range** -80°C to 450°C

**Pressure @ 20°C** 2500 PSIG (172 Bar), ISO KF 0 PSIG

## Specifications — 1, 2, 4, &amp; 8 Conductor

## Materials

Housing: 304 Stainless steel  
Pin: See table  
Insulation: Alumina ceramic  
Magnetic Materials: See table

**Voltage Rating** See table

**Current Rating** See table

**Temperature Range** -269°C to 450°C, ISO KF -25°C to 205°C

**Pressure @ 20°C** ISO KF 0 PSIG

Single pin: 3500 PSIG (241 Bar)  
2 & 4 pin: 1400 PSIG (96 Bar)  
8 pin: 500 PSIG (34 Bar)



FEEDTHROUGH

**Weld or Braze Superthru**

INSTALLATION	VOLTAGE DC	CONDUCTOR AMPS*	MATERIAL	PART NUMBER
Weld or Braze	500	-	Kovar Tube	9809-01-W
Weld or Braze	500	11.5	Molybdenum	9809-02-W

\*Current carrying capacity of the tubular feedthroughs varies based on the coolant used and the flow rate.

**Weldable Single Pin**

NO. PINS	INSTALLATION	VOLTAGE DC	CONDUCTOR AMPS	MATERIAL	A	DIMENSIONS B	C	MAGNETIC MATERIALS	PART NUMBER
1	Weld	1 kV	1.1	304 Stn. Stl.	-	-	-	No	9297-03-W
1	Weld	1 kV	5	Nickel	-	-	-	Yes	9297-01-W
1	Weld	1 kV	8.5	Molybdenum	-	-	-	No	9297-06-W
1	Weld	1 kV	16	Copper	-	-	-	No	9297-08-W
2	Weld	2 kV	1.1	304 Stn. Stl.	0.497 [12.62]	.020 [0.51]	-	No	9298-07-W
2	Weld	2 kV	5	Nickel	0.497 [12.62]	.020 [0.51]	-	Yes	9298-01-W
2	Weld	2 kV	8.5	Molybdenum	0.497 [12.62]	.020 [0.51]	-	No	9298-05-W
2	Weld	2 kV	16	Copper	0.497 [12.62]	.020 [0.51]	-	No	9298-06-W
4	Weld	2 kV	1.1	304 Stn. Stl.	0.497 [12.62]	.020 [0.51]	-	No	9299-05-W
4	Weld	2 kV	5	Nickel	0.497 [12.62]	.020 [0.51]	-	Yes	9299-01-W
4	Weld	2 kV	8.5	Molybdenum	0.497 [12.62]	.020 [0.51]	-	No	9299-04-W
4	Weld	2 kV	16	Copper	0.497 [12.62]	.020 [0.51]	-	No	9299-06-W
8	Weld	1.5 kV	1.1	304 Stn. Stl.	0.747 [18.97]	.035 [0.89]	-	No	9294-03-W
8	Weld	1.5 kV	5	Nickel	0.747 [18.97]	.035 [0.89]	-	Yes	9294-01-W
8	Weld	1.5 kV	8.5	Molybdenum	0.747 [18.97]	.035 [0.89]	-	No	9294-04-W
8	Weld	1.5 kV	16	Copper	0.747 [18.97]	.035 [0.89]	-	No	9294-08-W

**Weldable 2, 4, & 8 Pin**

**ISO FLANGE**

2	NW16KF	2 kV	1.1	304 Stn. Stl.	-	-	.9 [23]	No	17006-01-KF
2	NW16KF	2 kV	5	Nickel	-	-	.9 [23]	Yes	17006-02-KF
2	NW16KF	2 kV	8.5	Molybdenum	-	-	.9 [23]	No	17006-03-KF
2	NW16KF	2 kV	16	Copper	-	-	.9 [23]	No	17006-04-KF
4	NW16KF	2 kV	1.1	304 Stn. Stl.	-	-	.9 [23]	No	17007-01-KF
4	NW16KF	2 kV	5	Nickel	-	-	.9 [23]	Yes	17007-02-KF
4	NW16KF	2 kV	8.5	Molybdenum	-	-	.9 [23]	No	17007-03-KF
4	NW16KF	2 kV	16	Copper	-	-	.9 [23]	No	17007-04-KF
8	NW16KF	1.5 kV	1.1	304 Stn. Stl.	-	-	1.3 [34]	No	17008-01-KF
8	NW16KF	1.5 kV	5	Nickel	-	-	1.3 [34]	Yes	17008-02-KF
8	NW16KF	1.5 kV	8.5	Molybdenum	-	-	1.3 [34]	No	17008-03-KF
8	NW16KF	1.5 kV	16	Copper	-	-	1.3 [34]	No	17008-04-KF

**ISO KF 2, 4, & 8 Pin**

**CONFLAT FLANGE**

2	1 1/3" (NW16CF)	2 kV	1.1	304 Stn. Stl.	-	-	.9 [23]	No	17046-01-CF
2	1 1/3" (NW16CF)	2 kV	5	Nickel	-	-	.9 [23]	Yes	17046-02-CF
2	1 1/3" (NW16CF)	2 kV	8.5	Molybdenum	-	-	.9 [23]	No	17046-03-CF
2	1 1/3" (NW16CF)	2 kV	16	Copper	-	-	.9 [23]	No	17046-04-CF
4	1 1/3" (NW16CF)	2 kV	1.1	304 Stn. Stl.	-	-	.9 [23]	No	17048-01-CF
4	1 1/3" (NW16CF)	2 kV	5	Nickel	-	-	.9 [23]	Yes	17048-02-CF
4	1 1/3" (NW16CF)	2 kV	8.5	Molybdenum	-	-	.9 [23]	No	17048-03-CF
4	1 1/3" (NW16CF)	2 kV	16	Copper	-	-	.9 [23]	No	17048-04-CF
8	1 1/3" (NW16CF)	1.5 kV	1.1	304 Stn. Stl.	-	-	1.3 [34]	No	9340-06-CF
8	1 1/3" (NW16CF)	1.5 kV	5	Nickel	-	-	1.3 [34]	Yes	9340-01-CF
8	1 1/3" (NW16CF)	1.5 kV	8.5	Molybdenum	-	-	1.3 [34]	No	9340-04-CF
8	1 1/3" (NW16CF)	1.5 kV	16	Copper	-	-	1.3 [34]	No	9340-05-CF

**ConFlat 2, 4, & 8 Pin**

**Contacts**

TYPE	MATERIAL	DESCRIPTION	PART NUMBER
0.032 Crimp Contacts	Beryllium Copper	Accepts wire up to 0.032 [0.81]	11288-02-X†
0.042 Crimp Contacts	Stainless Steel - Gold Plated	Accepts wire up to 0.030 [0.76]	14461-04-A
Crimp Tool		For 0.025" - 0.075" Crimp Diameters	2840-05

\*Contacts priced and sold in packages of 10. \*\*Contacts priced and sold in packages of 5. †Shown in photo. See the Accessories section for more information on all accessories.